

B-401-DB-XT Split Collar Mount Sump


DOUBLEWALL SUMP (2-PIECE) FOR SHORT ROUND COLLARS
42" OR 48" DIAMETERS WITH 32" OR 36" REDUCERS
MANUFACTURED OF FIBERGLASS



AB-2481 Compliant
Third Party Approved

Eight Sided Sump
Great for 45° & 90°
Fiberglass Fittings

Short round collars
installed by your Tank
manufacturer

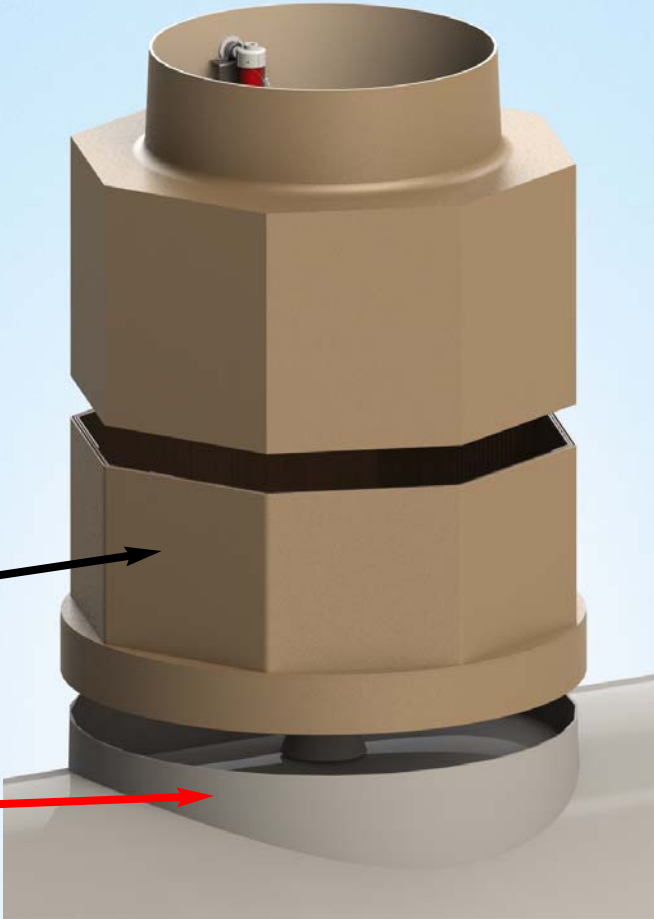

Compatible with
and warranted for
continuous exposure
to all common fuels
and alternative fuels
including ethanol
and biodiesel.




All sumps
ship under
20"Hg for
continuous
testing



EQ# 615

FEATURES:

- > Tank-Spec Fiberglass Construction
- > AB-2481 Compliant Monitored DoubleWall
- > Ships under a continuous 20"Hg vacuum test
- > Large flat walls for more entry fittings
- > Octagonal walls with round collar mount
- > 42" or 48" Diameters
- > 32" or 36" Diameter reducers
- > Includes Manometers and interstitial fluid
- > Height adjustable in the field

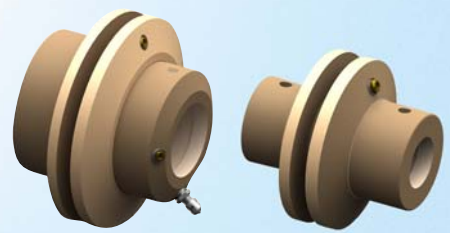

RECOMMENDED:
F-Series-D FRP Fittings Only

Patent# 6,823,886 - Other Patents Pending

13A



WWW.SBRAVO.COM
800-AT-BRAVO

