


**PATENTS
PENDING**

F-SERIES Adjustable Entry Fittings

0-10° ADJUSTABLE FITTING FOR SINGLEWALL FRP SUMPS
FOR SMITH / AMERON FRP PIPE AND STEEL CONDUIT

Angle Adjustable F-Series Entry Fitting !

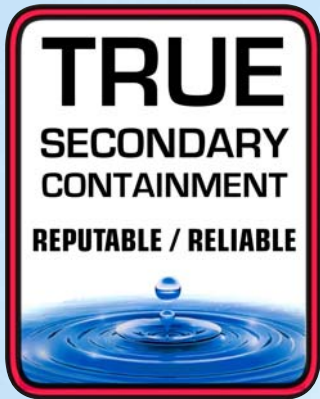

**UP TO 10°
OF ANGLE**



Third Party Approved



FEATURES:

- > Reduce Labor & Material
- > Dual-Port design
- > 0-10° degrees of adjustability
- > Tank-Spec FRP material
- > No metal or rubber parts
- > Warranted for fuel submersion
- > 30 Year Corrosion Warranty

PRODUCT SPECS:

Material . . . UL Fiberglass

PART #	Description
F-22-LS-T-ADJ-MP:	Multi-Port 0-10° degree entry for 2" LCX Coaxial FRP pipe
F-32-TS-T-ADJ-MP:	Multi-Port 0-10° degree entry for 3" over 2" FRP pipe
F-33-LS-T-ADJ-MP:	Multi-Port 0-10° degree entry for 3" LCX Coaxial FRP pipe
F-43-TS-T-ADJ-MP:	Multi-Port 0-10° degree entry for 4" over 3" FRP pipe
F-64-TS-T-ADJ-MP:	Multi-Port 0-10° degree entry for 6" over 4" FRP pipe

12A




WWW.SBRAVO.COM
800-AT-BRAVO




F-SERIES ADJUSTABLE

Adhesive Injection Port always installed at 12 'o'clock

Dual test ports at 9 and 6 'o'clock

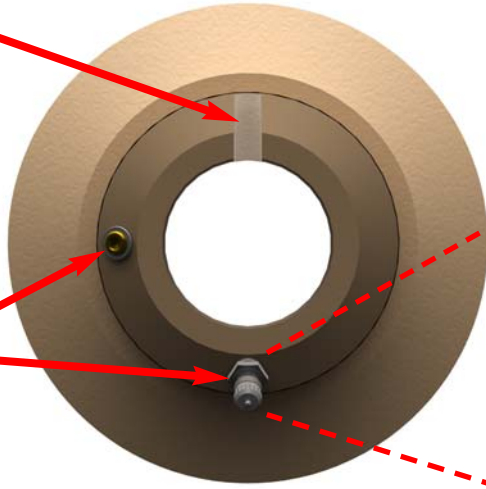

The Adjustable Multi-Port F-Series entry fitting has two test / drain port locations. One at 9 'o'clock and one at 6 'o'clock. This allows installers to choose the position that is compliant with their local regulatory requirements.

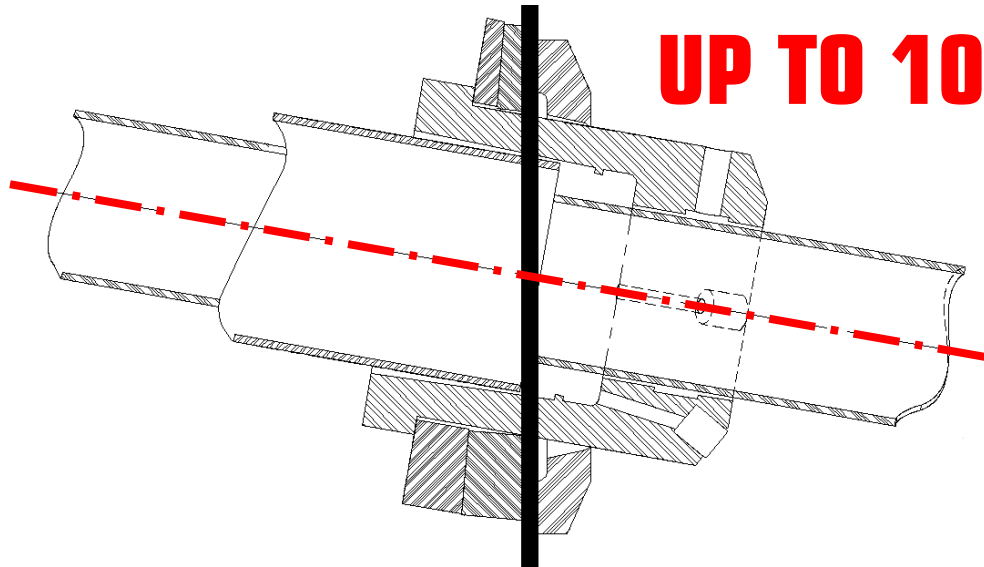

UP TO 10°

Primary passes through fitting for testing, while not permanently installed

After primary passes testing, the primary is then sealed to the fitting by adhesive injection then the secondary pipe is sealed and tested.


RECOMMENDED TOOLS FOR INSTALLATION: Refer to Instruction Manual

T-FS-SAND-GUN
T-FS-SAND-KIT

Sanding Gun (5/8")
Steel disc set for fittings



T-FS-SAND-KIT

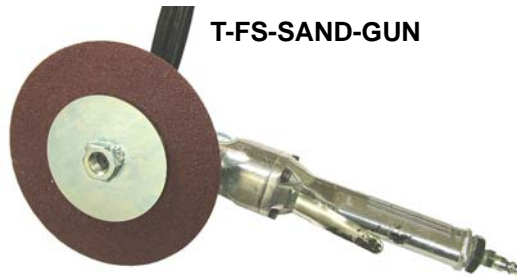

T-FS-SAND-GUN