


**PATENTS
PENDING**

D-BLR-S SPLIT RETROFIT FITTING FOR DOUBLEWALL SUMPS

F-XX-XX-D-BLR-S - SPLIT FITTING FOR CONDUIT & FIBERGLASS PIPE
ALL-FIBERGLASS RETROFIT FITTING FOR BLUE LINE KWIK-FIT FITTINGS

AVOID BREAKING CONCRETE ! BRAVO HAS YOUR PERMANENT SOLUTION

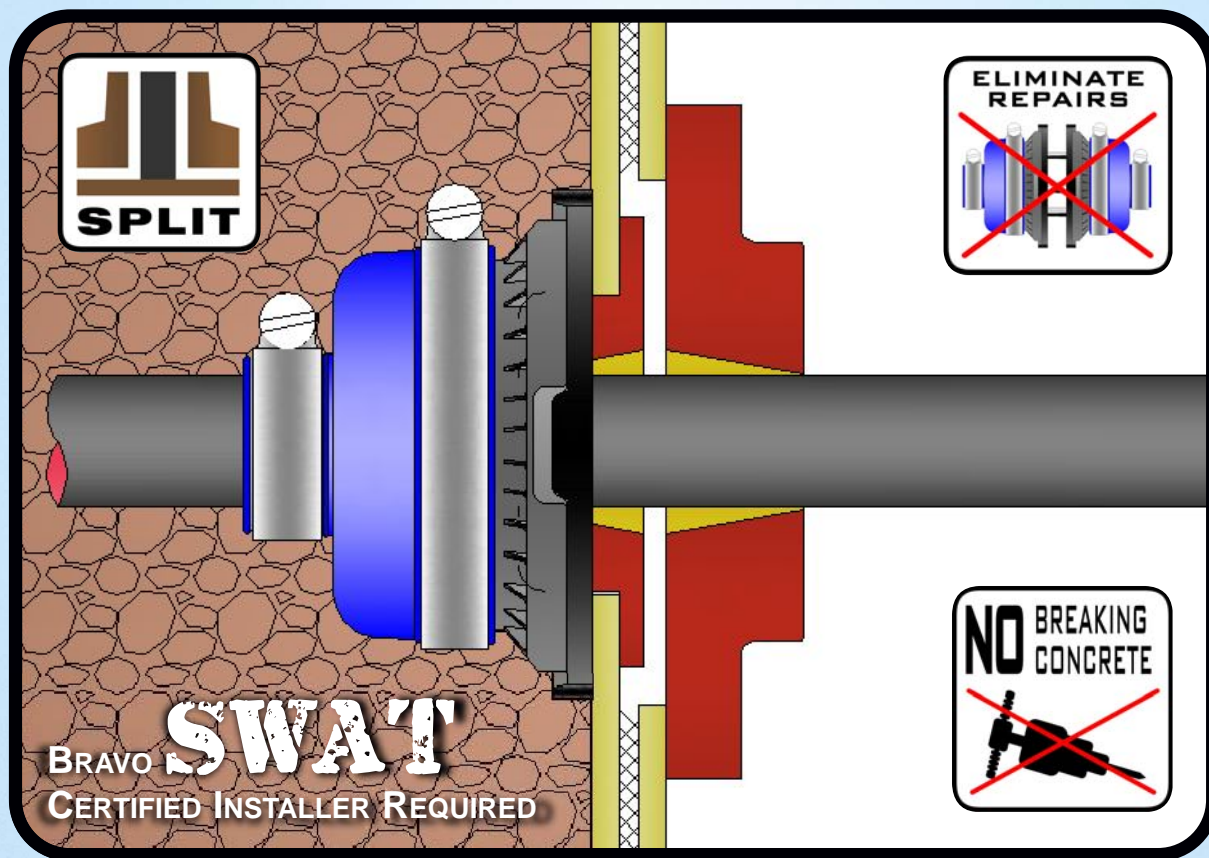

- > Designed for Blue Line Kwik-Fit boots
- > No breaking concrete, pipe or conduit
- > All "FRP" construction
- > California AB-2481 Compliant
- > Low profile and diameter
- > Modifiable in the field
- > Accommodates piping up to 10° degrees
- > Third Party Approved

**BUILT LIKE
A TANK**

materials match UST spec UL1316 to ensure longevity and fuel compatibility

THIRD PARTY APPROVED

15A



WWW.SBRAVO.COM
800-AT-BRAVO



BLUE LINE RETROFITS FOR FLAT DOUBLEWALL SUMPS

Model Number	Wall type	Pipe type and size	Allowed pipe angle	O.D.	Length	Adhesive Included	List
F-17-SS-D-BLR-S	Flat	3/4" galvanized conduit	10° deg.	6.75"ø	1.5"	2	\$ 412
F-17-RR-D-BLR-S	Flat	3/4" RobRoy conduit	10° deg.	6.75"ø	1.5"	2	412
F-10-SS-D-BLR-S	Flat	1" galvanized conduit	10° deg.	6.75"ø	1.5"	2	412
F-10-RR-D-BLR-S	Flat	1" RobRoy conduit	10° deg.	6.75"ø	1.5"	2	412
F-20-SS-D-BLR-S	Flat	2" fiberglass secondary	10° deg.	9"ø	1.5"	3	537
F-30-SS-D-BLR-S	Flat	3" fiberglass secondary	10° deg.	9"ø	1.5"	3	537
F-40-SS-D-BLR-S	Flat	4" fiberglass secondary	10° deg.	11"ø	1.5"	5	886

BLUE LINE RETROFITS FOR ROUND DOUBLEWALL SUMPS

Model Number	Wall type	Pipe type and size	Allowed pipe angle	O.D.	Length	Adhesive Included	List
F-17-SS-D-BLR-S-RND	Round	3/4" galvanized conduit	10° deg.	6.75"ø	2"	2	\$ 506
F-17-RR-D-BLR-S-RND	Round	3/4" RobRoy conduit	10° deg.	6.75"ø	2"	2	506
F-10-SS-D-BLR-S-RND	Round	1" galvanized conduit	10° deg.	6.75"ø	2"	2	506
F-10-RR-D-BLR-S-RND	Round	1" RobRoy conduit	10° deg.	6.75"ø	2"	2	506
F-20-SS-D-BLR-S-RND	Round	2" fiberglass secondary	10° deg.	9"ø	2"	3	563
F-30-SS-D-BLR-S-RND	Round	3" fiberglass secondary	10° deg.	9"ø	2"	3	625
F-40-SS-D-BLR-S-RND	Round	4" fiberglass secondary	10° deg.	11"ø	2"	5	886

EP100-RF 7oz retrofit epoxy kit. Includes tools. \$ 32

