

**PATENTS  
PENDING**

**TITAN SERIES MANWAY COVERS**  
**COMPOSITE MANWAY COVER AND SKIRT**  
*WATER-TIGHT O-RING SEAL - EN-124 C250 & H-25 RATED*  
*NEW CONST. & RETROFIT - MANUFACTURED OF FIBERGLASS*




MEET THE **TITAN** BY BRAVO




**TITAN STRONG**

Exceeds test ratings for  
EN-124 C250 (EU)  
and H-25 (US)

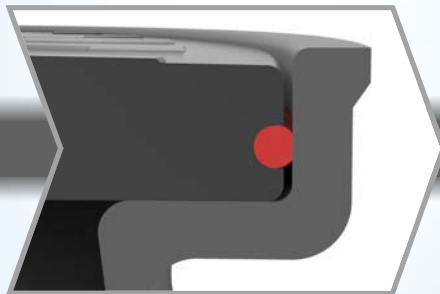

**WATER TIGHT**

Durable vertical o-ring  
maintains a true  
water-tight seal

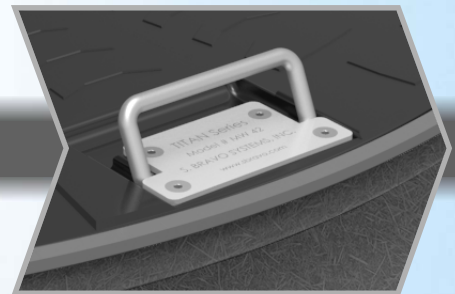

**NO CORROSION**

- > Fiberglass cover
- > Fiberglass skirt/frame
- > Stainless handle

NOTE: RED SEAL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PRODUCT APPEARANCE MAY DIFFER.

15A




WWW.SBRAVO.COM  
800-AT-BRAVO



# THE TITAN SPEC

ALL DIMENSIONS ARE THE SAME WITH OR WITHOUT THE O-RING SEAL

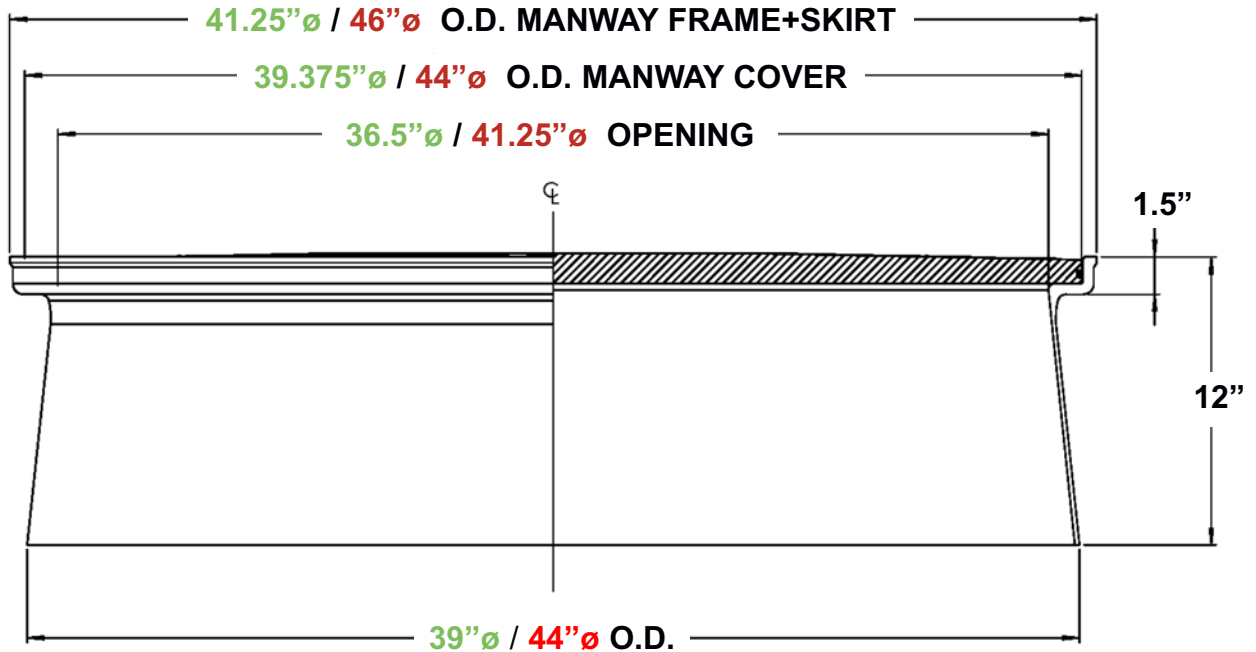

Cover O.D.	39.375" $\varnothing$ / 44" $\varnothing$
Load Ratings	EN-124 C250 & H-25
O-Ring Material	Buna-N
Handle Material	Stainless steel
Cover Color	Jet Black
Cover Weight	73 / 95 lbs
Cover Material	Composite FRP

Skirt O.D. (top)	41.25" $\varnothing$ / 46" $\varnothing$
Minimum I.D.	36.25" $\varnothing$ / 41.25" $\varnothing$
Skirt Height	12" *
Skirt Color	Jet Black
Skirt Weight	15 / 20 lbs
Skirt Material	Composite FRP

## NEW CONSTRUCTION TITAN MANWAYS

MWO36	39" $\varnothing$ FRP water-tight cover w/ o-ring seal & skirt/frame w/ 36" $\varnothing$ opening
MW36	39" $\varnothing$ FRP standard cover & skirt/frame w/ 36" $\varnothing$ opening
MWO42	44" $\varnothing$ FRP water-tight cover w/ o-ring seal & skirt/frame w/ 42" $\varnothing$ opening
MW42	44" $\varnothing$ FRP standard cover & skirt/frame w/ 42" $\varnothing$ opening
* ADR-MWS-6INCH	6" height extension for skirt (MAX TWO)

## RETROFIT TITAN MANWAYS

MW39R	39" $\varnothing$ FRP standard cover drop-in for OPW / EBW / EMCO / Flex-Ing covers
MW44R	44" $\varnothing$ FRP standard cover drop-in for OPW / EBW / EMCO / Flex-Ing covers

\* MUST BE ADDED AT THE TIME ORDER IS PLACED.