


42" & 48" DOUBLEWALL PIPING SUMP B400 & B401 D-AB / D-VAC-AB UNISUMP OCTAGONAL FIBERGLASS SUMP AND SPLIT CONFIGURATION HYDROSTATIC & VACUUM

Ships with
Combination Gauge
Factory Installed for
continuous monitoring

**Eight Sided Sump
Great for 45° & 90°
Fiberglass Fittings**

**Recommended:
F-Series DB Rigid
Fiberglass Fitting**



**Third Party Approved
AB-2481 Compliant**

**Notify Tank Manufacturer
That Tanks Require BRAVO
Doublewall Tank Collars.**

**Included with B400
Sump System:
One joint sealing kit
& interstitial fluid**


**New Extended
electronic monitor
housing
(Sensor not included)**

**B400 and B401
Available diameters:
42" ø has 15" Panels
48" ø has 18" Panels**



**Rigid doublewall
fiberglass split
configurations**

**Included with B401
Sump System:
Two joint sealing kits
& interstitial fluid**

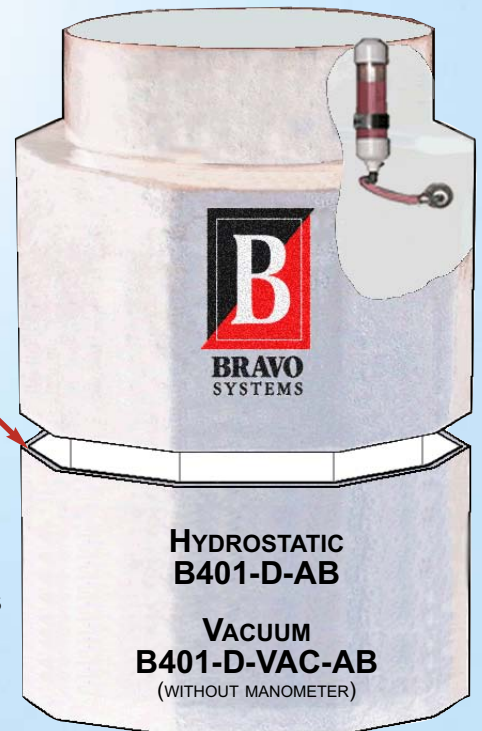

Patent # 6,823,886



323/888-4133

S. BRAVO SYSTEMS, INC • 2929 Vail Avenue • Commerce • CA • 90040
Fax: 323/888-4123 • E-mail: info@sbravo.com • www.sbravo.com

