

**DOUBLEWALL DEEP DISPENSER CONTAINMENT**  
**B-8000-BD-AB™ UNIBOX**  
 EASILY MONITORED DOUBLEWALL FIBERGLASS BOX  
 HYDROSTATIC OR VACUUM


Interchangeable dispenser frame allows future dispenser upgrades without breaking concrete

New Extended Adjustable electronic monitor housing (Sensor not included)

Ships with Combination Gauge Factory Installed for continuous monitoring

New Reinforced Doublewall fiberglass manufacturing process allows liquid fill time to be **measured in minutes!!**

Reinforced edges, top edges and lower corners are now thicker than before to prevent unwanted damage

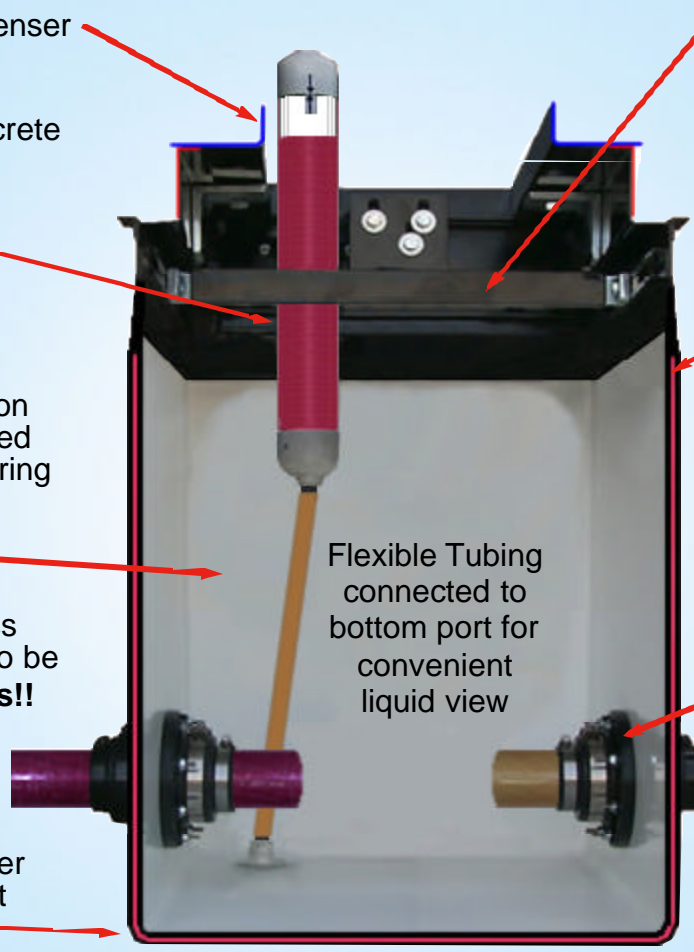

UL Listed

Interstitial fluid: Propylene Glycol

Required: **B-17-D** (not shown) 1" & 3/4" Flexible conduit double ended fitting

**B-33-D** 3" Flexible double ended fitting

Recommended: A.O. Smith™ or Ameron™ fiberglass pipe

**Product Dimensions:**

Width:	20"		
Depth:	29"		
Length:	Lrg	Med	Sm
	42"	30"	25.5"

**Third Party Approved: AB-2481 Compliant**

<b>HYDROSTATIC</b>	<b>B 8 000-D-AB</b>
<b>VACUUM</b>	<b>B 8 000-D-VAC-AB</b> (without manometer)

Patent # 6,823,886



323/888-4133

S. BRAVO SYSTEMS, INC • 2929 Vail Avenue • Commerce • CA • 90040  
 Fax: 323/888-4123 • E-mail: info@sbravo.com • www.sbravo.com



8000-D-AB-DS 6-05