

Product Shown
RLX-2.0-03-F

About the RLX-SD-AB Series

The RLX-SD-AB Series is used for double-sided repairs to eliminate continuous leak points caused by degraded flexible entry boots in doublewall sumps. It repairs both interior and exterior leaks with excavation. The split design doesn't require disconnecting pipe. Models available for all common flexible and semirigid piping. Quality FRP construction provides long term compliance solutions.

Bravo Solution Center

Call or Text (323) 541-3851
orders@sbravo.com

SIZES

- 1.5" -2"


MATERIAL

- Tank-spec fiberglass

SPECIFICATIONS

- Double-sided repair, excavation required
- Models available for flat or round walls
- 30-year warranty
- Installation corrects both interior and exterior wall leaks
- FRP sleeve seals to plastic piping
- AB2481 compliant
- UL2447 Listed



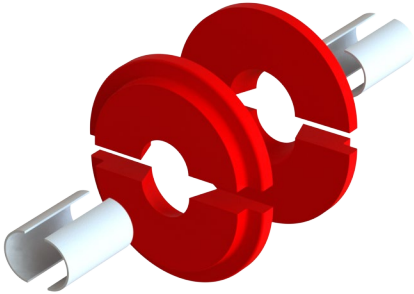

Retrofit SD-AB Series Double-Sided Split FRP Retrofit Entry Fittings for Rigid Pipe Flat Doublewall FRP Sumps (Excavation Required)

Pipe Type	Part #	Description	EPOXY REQ'D Qty	Flange Diameter
1.5" flex double-sided	RLX-2.0-03-F	1.5" flex double-sided split for flat doublewall sumps	EP100RF (X4)	9"
2" (2.5" O.D) flex double-sided	RLX-2.5-03-F	2" 2.5" O.D flex, double-sided split for flat doublewall sumps	EP100RF (X4)	9"
2" (2.65" O.D) flex double-sided	RLX-2.7-03-F	2" 2.65" O.D flex, double-sided split for flat doublewall sumps	EP100RF (X4)	9"

RLX-SD-AB Series Double-Sided Split FRP Retrofit Entry Fittings for Flex-Pipe Round Doublewall FRP Sumps

Pipe Type	Part #	Description	EPOXY REQ'D Qty	Flange Diameter
1.5" flex double-sided	RLX-2.0-03-R	1.5" flex double-sided split for round doublewall sumps	EP100RF (X4)	9"
2" 2.5" O.D flex double-sided	RLX-2.5-03-R	2"/ 2.5" O.D flex, double-sided split for round doublewall sumps	EP100RF (X4)	9"
2" 2.65" O.D flex double-sided	RLX-2.7-03-R	2"/ 2.65" O.D flex, double-sided split for round doublewall sumps	EP100RF (X4)	9"