

DISPENSER CONVERSION FRAME

CALIFORNIA STATE APPROVED SPILL CONTAINMENT DEVICE (UDSCCS)

MODEL CONV-B2000 / CONV-B2000-OPP



State Compliant
Proven Solution
since 1991

CA SWRCB
Approved

Third Party
Approved



- > Tailored exactly to the old dispenser, the new dispenser and the existing UDC below
- > Island/concrete & dispenser anchor mounting points with deep-socket ratchet access
- > Integrated water splash lip & drainage panels
- > Galvannealed & epoxy powder coated
- > Rugged & reinforced 12ga steel construction
- > 1/2" anchor bolts & frame caps included

NOTICE! Additional purchases may be required in CA





WWW.SBRAVO.COM
800-AT-BRAVO



BRAVO CONVERSION FRAME

WITH

WITHOUT

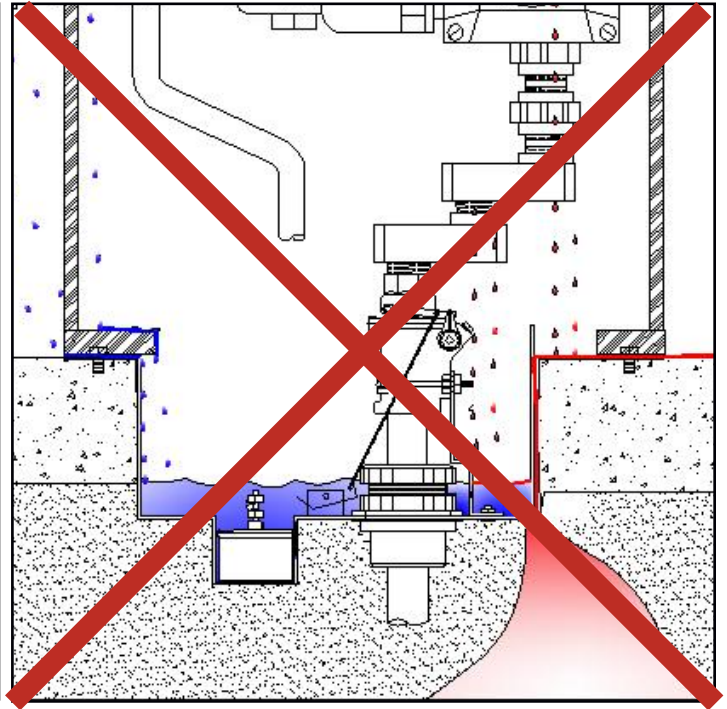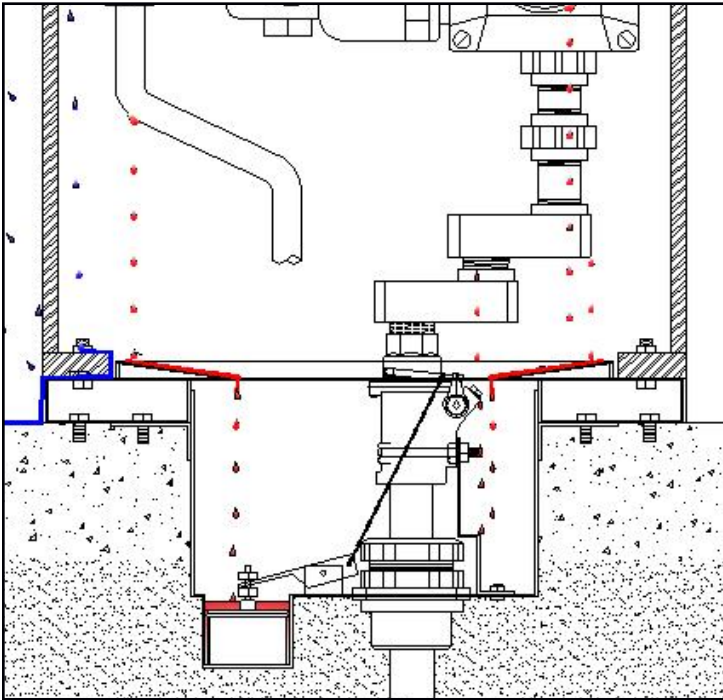


Prevent water intrusion & drain any fuel leaks back to the existing UDC no matter the size or model

Possible water intrusion and/or fuel release to island/grade and void of warranty if UDC or dispenser frame is modified

Water Splash for new dispenser prevents water intrusion. Typically 3/4" minimum height.

Angled plates to direct any leaks from hydraulic cabinet back into the existing UDC.

Alternate / additional structural supports for new concrete anchor bolts

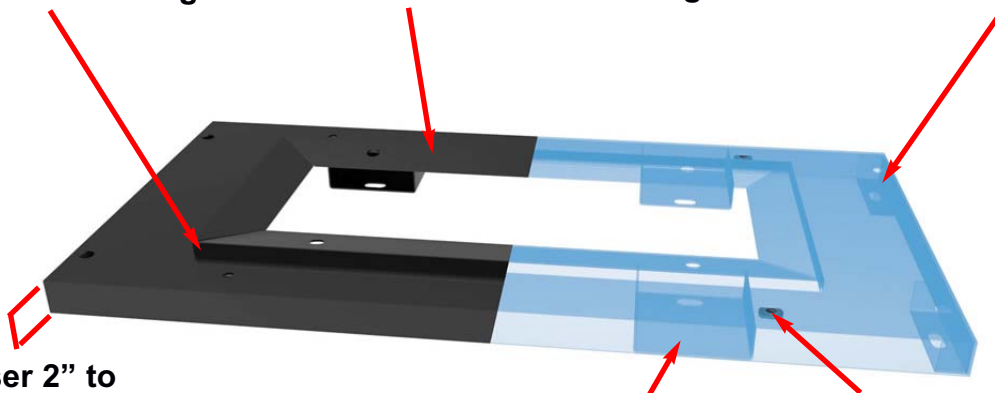

Raises dispenser 2" to clear sump water splash lip of existing UDC.

Height may be greater than 2" depending on application.

Structural supports for existing concrete anchor bolts to secure conversion frame to island / pad. Bolt points vary based on dispenser and range from 2-8.

New Dispenser Anchor Bolt point. These vary in number: 2-6 bolt points. (bolts are included but not installed)